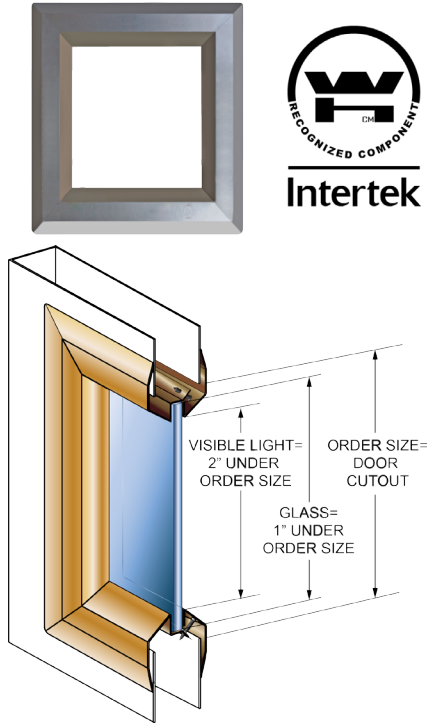
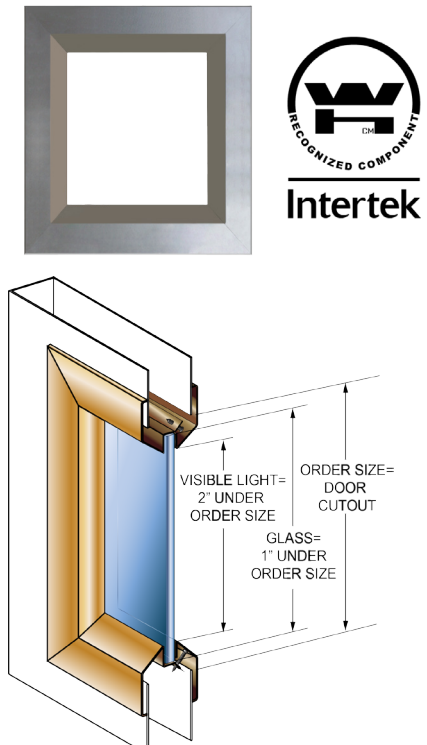


45-180 Minute Fire-Rated Steel Vision Kits*

SVL , Vision Lite Low Profile

ILLUSTRATION	SPECIFICATIONS
 <p>Intertek RECOGNIZED COMPONENT</p>	<p>For use in fire rated door applications under positive and neutral pressure. Intertek testing certification in compliance to NFPA 252 (2000), UL 10C (2009), CAN / ULS104 (2010), NFPA (201) and CSI CODE 0870 00.</p> <p>Specifications:</p> <ul style="list-style-type: none"> - Low Profile Beveled Vision Lite - 20 Gauge Cold Rolled Steel - Mitered welded corners with counter sunk mounting holes - Single side attaching with matching mounting screws included - For use with $\frac{3}{16}$" to $\frac{1}{4}$" glass thickness - Designed for use with $1\frac{3}{4}$" doors only - Baked on powder coat finish - Color: Standard Bronze - Fastener: # 8 x $\frac{7}{8}$" flathead phillips head SMS <p>Kit Options:</p> <ul style="list-style-type: none"> - Also available as a KIT or bundle which comes with the Frame, Glass and Glazing Tape. - Available glass types are Non-Fire Rated Tempered ($\frac{1}{4}$"), Fire Rated PROTECT3™ Wired Safety ($\frac{1}{4}$") and Pyran® Platinum F Glass ($\frac{3}{16}$") <p>Notes:</p> <ul style="list-style-type: none"> - Order size is equal to opening size - Visible vision opening is 2" under order size - Glass size dimension is 1" under complete order size - Follow all door manufacturer's instructions for use and installation of all products * Refer to price list for list of fire rated sizes * Custom sizes are available. See price list.

VL , Vision Lite Standard Profile for $\frac{3}{16}$ " to $\frac{1}{4}$ " Thick Glass Frames 10VL , Vision Lite Standard Profile for 1" Thick Glass Frames

ILLUSTRATION	SPECIFICATIONS
 <p>Intertek RECOGNIZED COMPONENT</p>	<p>For use in fire rated door applications under positive and neutral pressure. Intertek testing certification in compliance to NFPA 252 (2000), UL 10C (2009), CAN/ULS104 (2010), NFPA (201) and CSI CODE 0870 00.</p> <p>Specifications:</p> <ul style="list-style-type: none"> - Standard Profile Beveled Vision Lite - 20 Gauge Cold Rolled Steel - Mitered welded corners with counter sunk mounting holes - Single side attaching with matching mounting screws included - For use with $\frac{3}{16}$" to $\frac{1}{4}$" glass thickness - Also available for 1" glass thickness (10VL Series) - Designed for use with $1\frac{3}{4}$" doors only - Baked on powder coat finish - Color: Standard Bronze - Fastener: # 8 x $\frac{7}{8}$" flathead phillips head SMS <p>Kit Options:</p> <ul style="list-style-type: none"> - Also available as a KIT or bundle which comes with the Frame, Glass and Glazing Tape. - Available glass types are Non-Fire Rated Tempered ($\frac{1}{4}$"), Fire Rated PROTECT3™ Wired Safety ($\frac{1}{4}$") and Pyran® Platinum F Glass ($\frac{3}{16}$") <p>Notes:</p> <ul style="list-style-type: none"> - Order size is equal to opening size - Visible vision opening is 2" under order size - Glass size dimension is 1" under complete order size - Follow all door manufacturer's instructions for use and installation of all products * Refer to price list for list of fire rated sizes * Custom sizes are available. See price list.