


LAVATORY MOUNTED SOAP DISPENSER

- Pump Type Valve
- 2-1/2" Spout
- 4-3/4" Shank

Bradex™



DIMENSIONS			
Model	A	B	Capacity
6322	7-1/8" (181 mm)	2-1/2" (64 mm)	16 oz.
6322-67	5" (127 mm)	2-3/4" (70 mm)	16 oz.
6322-68	8-15/16" (227 mm)	3-1/4" (83 mm)	32 oz.

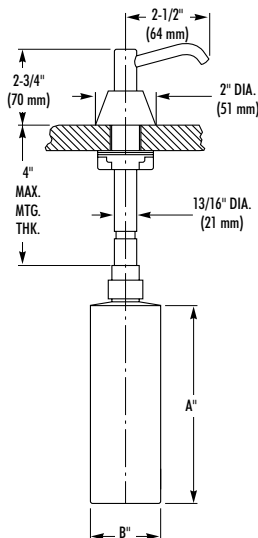

CONSTRUCTION:

- **PLUNGER AND SPOUT** fabricated of type 316 stainless steel.
- **ESCUTCHEON** manufactured of heavy chrome plated brass.
- **SHANK** manufactured out of molded ABS plastic.
- **VALVE CYLINDER** manufactured out of molded clear ABS plastic.
- **VALVE COMPONENTS** are manufactured out of Celcon, Buna-N rubber or stainless steel.
- **PLASTIC GLOBE** manufactured out of translucent polyethylene.

OPERATION:

Depress piston for measured amount of liquid soap. Fills from top by unlocking and withdrawing piston and spout assembly using special key provided. The 6322 will dispense vegetable or coconut oil liquid soaps, synthetic detergents, and antiseptic solutions in a liquid form. Spout rotates 360°.

INSTALLATION:

Mount dispenser in 1" diameter hole in lavatory or counter-top. Include dispenser mounting hole location in lavatory specifications or mount in unused faucet hole. Shank will accommodate a maximum 4" mounting thickness and can be cut in the field.

OPTIONAL FEATURES:

Feature	Suffix
<input type="checkbox"/> Metal globe (stainless steel) 16 oz.	-67
<input type="checkbox"/> Plastic globe 32 oz.	-68

GUIDE SPECIFICATION:

Lavatory mounted liquid soap dispenser manufactured of type 316 stainless steel, chrome plated brass and molded ABS plastic. Buna-N O-ring seals and duckbills. Valve shall dispense measured amount of vegetable or coconut oil liquid soap, synthetic detergents, or antiseptic solutions. Servicing is facilitated by use of special wrench.

Lavatory Mounted Liquid Soap Dispenser shall be Bradley Model 6322.