


## HOW TO ATTACH HAMMER OR BREAKER BAR ASSEMBLY TO CABINET

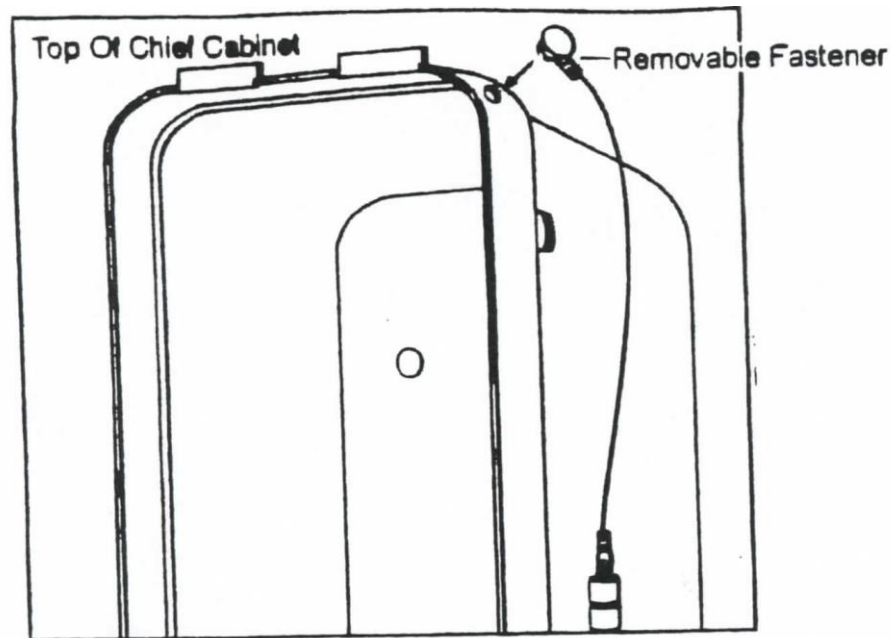

- Insert removable fastener (which is already attached to breaker bar or hammer) into pre-drilled 9/32" hole. When frame is placed on cabinet it will effectively lock the fastener in place.
- To remove fastener, remove frame and push fastener out from the inside using fingers.
- NEW rust-free hexagonal lock and key: simply place key in lock and turn ¼ turn clockwise to open and ¼ turn counterclockwise to lock.