

SUBMITTAL: FX2 FIRE-RATED EXTINGUISHER CABINET FOR ELLIPSE™ LOW PROFILE EXTINGUISHERS

PG 1 OF 2

This Series Features a Low Profile Tub to Accommodate the Orbit FE10V Fire Extinguisher* to Fit Into a 3 5/8" Stud Wall.

Door & Trim Construction: Cold rolled steel with white powder-coated finish, anodized aluminum, stainless steel with # 4 finish, US3 polished brass or US10 satin finish bronze. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge, zinc-plated handle and roller catch. All models have 1-3/4" wide trim on frame and 1-1/4 trim on doors with glazing. Glazed models have clear acrylic glazing.

Trim Style & Depth: Recessed Flat 3/8" Trim.

Tub: The tub is constructed of cold rolled steel with white powder-coat finish standard. Tub forms a flange to cover cut edges of wallboard material. Fire-resistant material is attached to the exterior of the tub. Extinguisher rests on a 1" high shelf.

Fire-Rating: Fire-FX2™ cabinets are fabricated in accordance with the UL label for one and two hour combustibile and non-combustibile wall system building codes. The fire testing has met the requirement of ANSI/UL 1479 (ASTM –E814) and ULC/CAN S115-for membrane and penetration firestops. Installation instructions must be strictly adhered to in order to obtain the fire rating.



2115G10FX2
Steel Cabinet with
Standard White
Finish

STEP 1: SELECT MODEL NUMBER BY FINISH AND QUANTITY ON CHART (refer to chart on page 2)

STEP 2: SELECT DOOR STYLE WITH HANDLE

Check one box below Examples on Page 2

- ☐ **F10** Full Glazing in 1-1/4" wide Frame
- ☐ **G10** Full Glazing with SAF-T-LOK™ in 1-1/4" Frame
- ☐ **D10** Horizontal Duo Panel
- ☐ **E 0** Horizontal Dual Panel with SAF-T-LOK™
- ☐ **S21** Solid Door

- ☐ **L22** Solid with SAF-T-LOK™
- ☐ **L24** Solid with Cylinder Lock - No Handle
- ☐ **V10** Vertical Duo
- ☐ **W10** Vertical Duo with SAF-T-LOK™



STEP 3: OPTIONAL FEATURES AT ADDED COST (SELECT ANY)

- ☐ Optional Tub Color: ☐ Black ☐ Red ☐ Silver
- ☐ Futura "Fire" Pull ☐ Mill Alum ☐ Red ☐ White
- ☐ Polished Chrome Handle (**PUCH**)
- ☐ Magnetic Catch for 2115 (**-MC**) Replaces Roller Catch
- ☐ Optional Colors: ☐ Red ☐ Black ☐ Flat Black
- ☐ ☐ Sand ☐ AMS Beige ☐ SC Flat Beige
- ☐ ☐ Gray ☐ Bronze ☐ Silver

- ☐ Black Vertical FE Letters **LDCVBFE**
- ☐ Red Vertical FE Letters **LDCVRFE**
- ☐ White Vertical FE Letters **LDCVWFE**
- ☐ Black Horizontal FE Letters **LDCHBFE**
- ☐ Red Horizontal FE Letters **LDCHRFE**
- ☐ White Horizontal FE Letters **LDCHWFE**
- ☐ Black Vertical FE Decal **LDVBFE**
- ☐ Red Vertical FE Decal **LDVRFE**
- ☐ White Vertical FE Decal **LDVWFE**
- ☐ Black Horizontal FE Decal **LDHBF**
- ☐ Red Horizontal FE Decal **LDHRFE**
- ☐ White Horizontal FE Decal **LDHWFE**


For More Information on Options See Other Submittals: [Handles & Levers](#) [Decals/Die Cuts & Wall Signs](#).




 JL INDUSTRIES	 ACTIVAR INC. CONSTRUCTION PRODUCTS GROUP	Distributor:		Quantity:
		Contractor:		Approved By:
		Model #:		Architect:
		Project:		Date:
DOWNLOAD CURRENT SUBMITTAL BEFORE ORDERING		© 2018 Activar Construction Products Inc		
HEADQUARTERS: 9702 NEWTON AV S, BLOOMINGTON, MN				
MANUFACTURING: BLOOMINGTON MN & COMMERCE, CA • WAREHOUSES: FT MYERS FL, ATLANTA GA, DALLAS TX, SEATTLE WA, LANCASTER PA, FARGO ND, OMAHA NE 2/6/2018				

SUBMITTAL: FIRE-RATED EXTINGUISHER FOR ORBIT™ LOW PROFILE EXTINGUISHERS

TRIM & DOOR SERIES #			Tub I.D.			Frame O.D.		FX2 Wall Opening			Specialty Extinguishers Such as Orbit FE10V
QTY	Model	Material	A	B	C	E	F	W	H	D	
	2115	Steel, White Painted	12	27	3 1/4	15 3/8	30 3/8	14 5/16	29 5/16	4 1/4	
	2125	Anodized Aluminum	12	27	3 1/4	15 3/8	30 3/8	14 5/16	29 5/16	4 1/4	
	2135	Stainless Steel	12	27	3 1/4	15 3/8	30 3/8	14 5/16	29 5/16	4 1/4	
	2145	US10 Satin Bronze	12	27	3 1/4	15 3/8	30 3/8	14 5/16	29 5/16	4 1/4	
	2155	US3 Polished Brass	12	27	3 1/4	15 3/8	30 3/8	14 5/16	29 5/16	4 1/4	

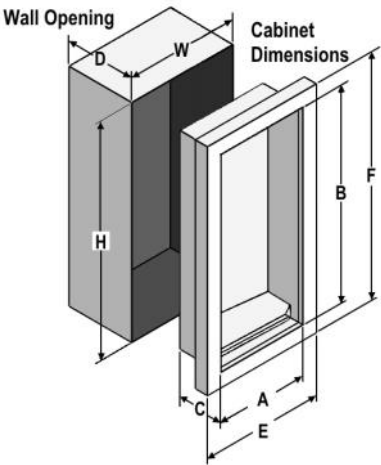

FIRE-FX2 CABINET WITH NEW LIGHTWEIGHT INSULATION

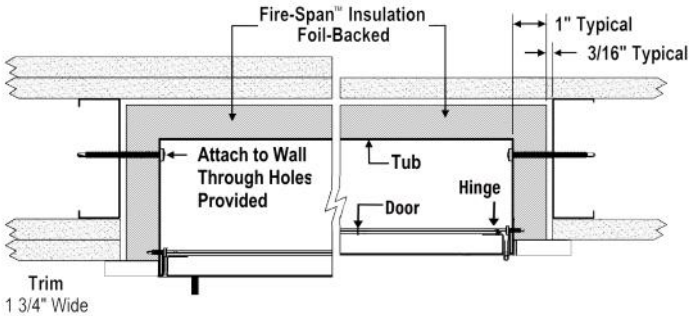

TYPICAL INSTALLATION

ADA Cabinet Mounting Height: Standard Pull on G, E, W, and L22 Door Styles with Saf-T-Lok are 3 5/8" Higher than Door Center, so Allow for that When Mounting Cabinet.
Standard Pull with No Lock is Centered on Door.



- F - Full glass with pull handle
- G - Full glass with pull handle above Saf-T-Lok
- D - Horizontal duo panel with pull handle
- E - Horizontal duo panel with pull handle above Saf-T-Lok.
- V - Vertical duo panel with pull handle
- W - Vertical duo panel with pull handle above Saf-T-Lok.
- S21 - Solid with pull handle
- L22 - Solid with pull handle above Saf-T-Lok
- L24 - Solid with cylinder key lock and no handle (Not Shown)