

SUBMITTAL: SAF-T-HATCH™ SAFETY RAIL FOR ROOF OPENINGS

The Saf-T-Hatch Railing can be installed on any manufacturer's roof Hatch. This Patented railing system features a clamping frame that is assembled around the curb base of roof hatch or skylight. This railing does not penetrate the curb or the roof deck - it is designed to protect your roof warranty. Meet OSHA required compliance for safe egress and ingress through all of your rooftop hatch openings while hatch is in use. Complies with OSHA [CFR 29 -1910.23](#) and [CFR 29 - 1910.27](#).

SPECIFICATIONS:

Pipe Rail: 1.66" O.D. galvanized steel tubing.

Tubing Base: 2" x 2" 16 gauge galvanized steel.

Tubing Base Pad: Styrofoam 3/4" thick isolated pad.

Finish: Safety yellow powder coat paint finish

Hardware: Zinc plated threaded rods, caps, nuts, bolts and washers.

Chain: Zinc plated 3/16" ASTM proof coil with hoop and rings as required

Pipe Caps: Plastic inserts, black.

Installation: Quickly installs by a clamping frame around curb base of roof hatch or fire hatch. Does not penetrate the roof deck or require "approved" installer. Fits all brands of existing roof hatches with cap flashing - field adjustable to fit flashing size.

STEP 1 - ENTER QUANTITY AND SELECT MODEL ON PAGE 2

STEP 2 - SELECT OPTIONAL FEATURES AT ADDITIONAL COST:


___ **SHG-2436 [Steel Gate Option](#):** fits roof hatches with opening size from 24" to 36".

___ **-GRAB:** Optional Welded Grab Bar for Models Narrower than 36" (Standard on Models with 36" or greater opening)

Integrated RHG Steel Roof Hatch with Permanent Rail Supports - See Separate Submittal- [See Model RHG-STH](#).

SHWC-3036 In Stock at One or More of Our Warehouses!

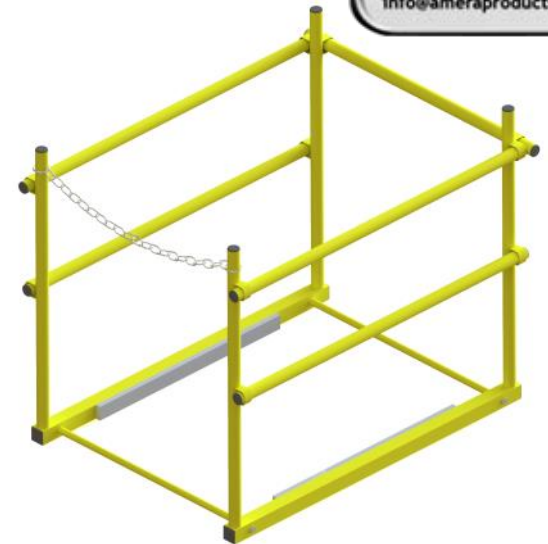

Distributed by
www.Ameraproducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com



SHWC 3036 RAILING WITH STANDARD ZINC-PLATED CHAIN



SHG-2436 OPTIONAL GATE—SEE SEPARATE SUBMITTAL FOR DETAILS

 JL INDUSTRIES	 ACTIVAR INC. CONSTRUCTION PRODUCTS GROUP SAF-T-HATCH™ IS A TRADEMARK OF ACTIVAR DOWNLOAD THE MOST CURRENT SUBMITTAL BEFORE ORDERING	Distributor:	Quantity:
		Contractor:	Approved By:
		Model #:	Architect:
		Project:	Date: © 2017 Activar Construction Products Group, Inc
HEADQUARTERS & JL INDUSTRIES: 9702 NEWTON AV S, BLOOMINGTON, MN 55435-5416 ACPG WEST COAST/SAMSON: COMMERCE, CA WAREHOUSES: DALLAS TX, FORT MYERS FL, LANCASTER PA, ATLANTA GA, CHICAGO, IL, SEATTLE WA, FARGO ND, OMAHA NE, 2/21/2017			


SUBMITTAL: SAF-T-HATCH™ SAFETY RAIL FOR ROOF OPENINGS

Distributed by
 www.AmeraProducts.com
 Phone: (800) 608-6568
 Fax: (409) 840-5545
 info@ameraproducts.com


Qty	Model Please note new part #	Curb Opening Railing Egress Side	Curb Opening	Approx Weight	Fits ACPG Roof Hatch Model	Includes Grab Bar
	SHWC-3036	30"	36"	66 lbs	RHA/RHG/RHR-1	N
	SHWC-3054	30"	54"	70 lbs	RHA/RHG-2	N
	SHWC-3096	30"	96"	80 lbs	RHA/RHG-3	N
	SHWC-3636*	36"	36"	68 lbs	RHA/RHG-4	Y
	SHWC-4848*	48"	48"	75 lbs	RHA/RHG-5	Y (2)

NEW STANDARD SIZES NOW AVAILABLE BELOW!

Qty	Model	Curb Opening Railing Egress Side	Curb Opening	Approx Weight	Fits Roof Hatch with Outside Curb Dimensions Length x Width	Includes Grab Bar
	SHWC-2424	24"	24"	55 lbs	26" x 26" Min 30" x 30" Max	N
	SHWC-2430	24"	30"	60 lbs	26" x 32" Min 30" x 36" Max	N
	SHWC-2436	24"	36"	60 lbs	26" x 38" Min 30" x 42" Max	N
	SHWC-2496	24"	96"	75 lbs	26" x 98" Min 30" x 102" Max	N
	SHWC-3030	30"	30"	65 lbs	32" x 32" Min 36" x 36" Max	N
	SHWC-3648*	36"	48"	70 lbs	38" x 50" Min 42" x 54" Max	Y
	SHWC-3696*	36"	96"	90 lbs	38" x 98" Min 42" x 102" Max	Y

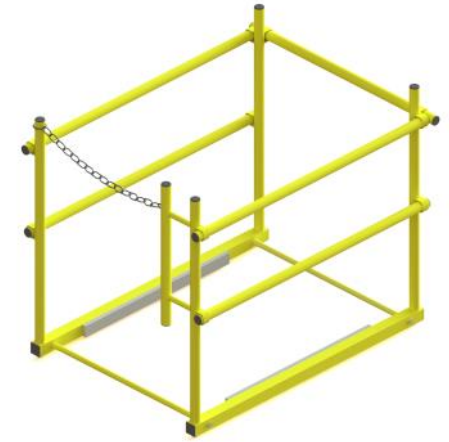

**SHWC-3636 SHOWN WITH STANDARD GRAB BAR
 (Standard with 36" and Greater Egress)**

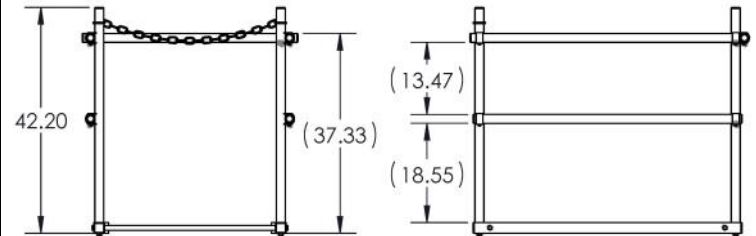

Egress View

Other View

* Models that include grab bar SHWC-3636, SHWC-4848, SHWC-3648, SHWC-3696

CUSTOM SIZES AVAILABLE UPON REQUEST:

Outside Curb Dimension Egress Side: _____

Outside Curb Dimension Other Side: _____

Please attach drawing and clearly indicate egress side and location of stair or ladder.

Contact Customer Service for Custom Requests.