


Standard, Multi-Purpose, Thru-Bolted Square Profile Vision Lite for Up to 1/4" Thick Glazing

**SPECIFICATIONS:**

<b>Material:</b>	18 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below.
<b>Construction:</b>	1-1/4" trim with radius corners, mitered and welded. Countersunk mounting holes on both sides.
<b>Door:</b>	For 1-3/4" door. <b>Door cutout = order size.</b>
<b>Fasteners:</b>	#8 x 32 flathead phillips head thrubolts with blank heads one side to match finish.
<b>Powder Coat Finishes:</b>	__ __ (B) Mineral Bronze (standard color) __ __ (G) Gray __ __ (BK) Black __ __ (FBK) Flat Black __ __ (W) White __ __ (SB) SC Beige __ __ (SI) Silver __ __ (R) Red __ __ (S) Sand __ __ (AB) AMS Beige __ __ (GH) Gray Hammertone <a href="#">View Colors Online</a>
<b>Glass:</b>	3/16" - 1/4" glazing to be ordered separately from <b>Glazing Section</b> of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 1" under rough opening size. <u>Glass size is 1/4" under order size.</u> <b>Fire-Rated Air Louvers Glazing to fit this vision frame: WS, KFRF, PPF.</b>
<b>Fire-Rating, Testing &amp; Listings:</b>	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.

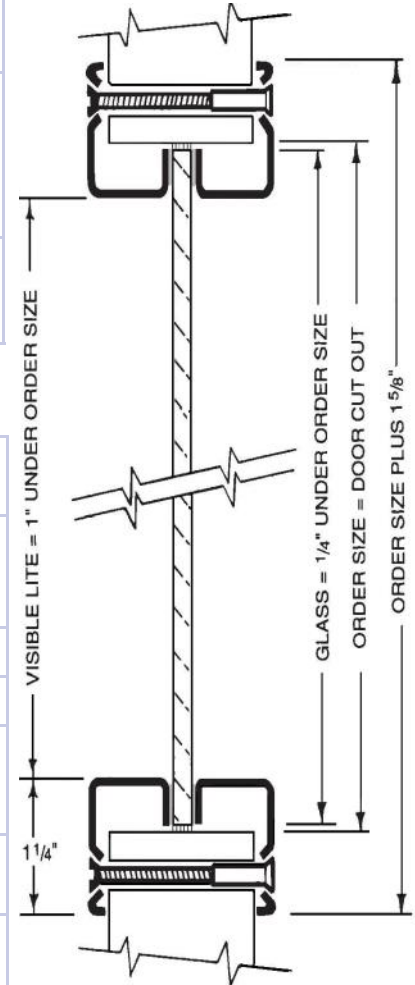

**OPTIONS AT ADDITIONAL COST:**



<b>UBC 7-2 Installation:</b>	__ __ Additional intumescent tape for <b>Positive Pressure UL10C</b> 20 minute combustible core wood doors installation. See detailed installation instructions.
<b>Finishes &amp; Materials:</b>	__ __ (S) 18 Gauge Stainless Steel: #4 Finish. __ __ (G) Galvanized Sheet for Exterior Applications. __ __ (E) Electro Zinc Plating for Maximum Corrosion Resistance.
<b>Fasteners:</b>	__ __ Torx __ __ Other: _____
<b>Mullions:</b>	Factory welded to vision lite & painted. See Mullions Page in this section to order.
<b>Custom:</b>	PAK, smaller or larger sizes. Leadlined. Please consult Customer Service for Special Orders. See Page 14 for Custom Shapes. <b>See Page 9 for Round, Half-Round &amp; Radius Frames in this Catalog.</b>
<b>Privacy Door:</b>	VLPVC 16 gauge door on continuous hinges welded to vision lite. Minimum size 4" x 4", max size 60" x 60". See Privacy Options Tab.
<b>Privacy Screen:</b>	Add the New Privacy Screen to This Vision Lite—

Order Format: VLF

Option S,G,EG W H Color

Example: VLF 1212FBK

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

	<b>Distributor:</b> _____	<b>Width:</b> _____ <b>x Height:</b> _____
	<b>Architect:</b> _____	<b>Quantity:</b> _____
	<b>Contractor:</b> _____	<b>Model:</b> _____
	<b>Project:</b> _____	<b>Date:</b> _____ <b>Version:</b> ALPDS1605

Distributed by  
**www.Ameraproducts.com**  
 Phone: (800) 608-6568  
 Fax: (409) 840-5545  
 info@ameraproducts.com