


Recommended Installation Height for Americans with Disabilities Act (ADA)

Mobility access within washroom facilities

The Americans with Disabilities Act (ADA) defines the accessible requirements for the design and construction of washroom space in the United States. Detailed below are examples of the installation requirements for hand dryers. The iStorm has been designed to comply with these recommendations.

As for the visually impaired, Rule 4.4.1 states:

Objects projecting from walls (for example, telephones) with their leading edges between 27 in and 80 in (685 mm and 2030 mm) above the finished floor shall protrude no more than 4 in (100 mm) into walks, halls, corridors, passageways, or aisles. Objects mounted with their leading edges at or below 27 in (685mm) above the finished floor may protrude any amount.

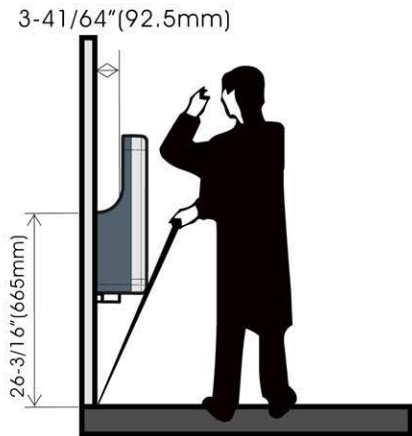

According to ADA Regulation 4.2.5 concerning forward reach:

If the clear floor space only allows forward approach to an object, the maximum high forward reach allowed shall be 48 in (1220 mm). The minimum for low forward reach is 15 in (380 mm).

