


MODEL 7405

When installed as specified below, unit meets Barrier-Free requirements

TILT MIRROR/SHELF

- Fixed Tilt
- Welded Corners

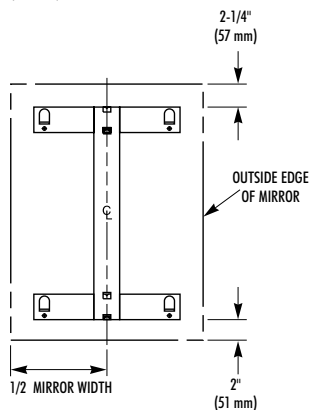

CONSTRUCTION:

- **FRAME** fabricated of type 304 (18-8), 18 gauge stainless steel, corners heliarc welded and ground smooth to satin finish. 20 gauge angle stiffeners welded to frame provide additional rigidity.
- **BACK** fabricated of 20 gauge galvanized steel, secured to frame with concealed screws equipped with integral horizontal hanging brackets.
- **MIRROR** of first quality 1/4" float glass, triple silver plated with electro-copper plated layer and thermosetting infrared cured paint backing with Poly-Glaze protective finish. Meets federal specification DD-M-00411b against silver spoilage and guaranteed for 15 years.
- **WALL HANGER** fabricated of 18 gauge cold rolled steel, all welded construction to form rigid template.
- **SHELF** fabricated of type 304 (18-8), 18 gauge stainless steel with exposed surfaces in architectural satin finish. Flanged front and sides with welded, ground and polished corners, welded to frame.
- **SHELF BRACKETS** fabricated of 16 gauge stainless steel are provided on units exceeding 48" width.

INSTALLATION:

Secure concealed mounting bracket to wall with screws (included) at holes provided. **NOTE:** Provide in-wall backing at mounting screw locations. Position mirror over mounting bracket to engage hanger tabs. Slide mirror down and lock into position.

OPTIONAL FEATURES:

Feature	Suffix
<input type="checkbox"/> 1/4" tempered glass mirror in lieu of polished float glass mirror	-2
<input type="checkbox"/> Laminate glass	-3
<input type="checkbox"/> Highly polished No. 8 architectural finish, 20 gauge stainless steel in lieu of polished float glass mirror	-4
<input type="checkbox"/> Bright annealed 20 gauge stainless steel in lieu of polished float glass mirror	-5
<input type="checkbox"/> Plexiglass	-6

NOTE: An inherent characteristic of a manufacturing process is distortion which may vary from mirror to mirror.

GUIDE SPECIFICATION:

Fixed tilt mirror shall be framed with type 304 (18-8), 18 gauge stainless steel with 20 gauge concealed stiffeners. Welded corners shall be polished to a uniform satin finish. Mirror shall be of first quality 1/4" float glass guaranteed for 15 years against silver spoilage and protected by a shock absorbing, waterproof foam filler with Poly-Glaze protective finish. Back of unit shall be 20 gauge galvanized steel secured to frame with concealed screws, equipped with integral horizontal hanging brackets and separate wall hanger for concealed mounting. Integral 18 gauge stainless steel shelf shall have front and side flanges with welded and polished corners.

Fixed Tilt Framed Mirror shall be Bradley Model 7405-_____ " W x _____ " H (specify width and height).

Bradex™ Models				
Width (Inches)	Height (Inches)	Overall Dimension (Inches)	Overall Dimension (Millimeters)	Standard Model Number
16"	30"	16 x 30	406 x 762	7405-1630
18"	30"	18 x 30	457 x 762	7405-1830
18"	36"	18 x 36	457 x 914	7405-1836
24"	30"	24 x 30	610 x 762	7405-2430
24"	36"	24 x 36	610 x 914	7405-2436

Document No. 8730

This information is subject to change without formal notice.
MD 3239-1198